




REVERSIBLE LAND LEVELLER

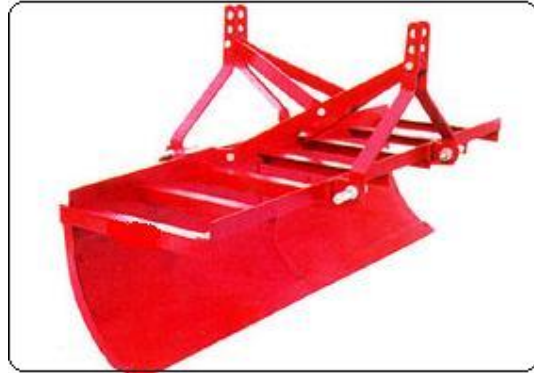

"TAURUS" Reversible Land Leveler is ideal for leveling, filling, back filling, farm yard clearing etc. Soil retaining wings can be optionally fitted on both ends of the blades for carrying the soil without spillage. It is suitable for non- sticky soils.

BENEFITS:

- It is a simple and rugged Implement which is directly fitted to the tractor.
- It is a basic implement for leveling, filling, back filling of land

FEATURES:

- Leveling blade is made out of special steel which gives it double the life compared to other ordinary blades.
- Given 2 Nos. of three point linkage for attaching to the tractor from both sides.

SPECIFICATIONS:

FRAME	50X6mm Angle
SIDE SUPPORT	7 Nos. (40X5mm Angle)
WIDTH	24. Blade
THICKNESS OF PLATE	1.75mm (14 Gauge)
THICKNESS OF BLADE	10X70mm
3 POINT LINKAGE	50X12mm
CENTRAL SUPPORT	7 Nos. (50X6 mm Angle)
LINKAGE PIN	28mm
LINKAGE BOLT	100x16mm
WEIGHT	105 Kgs. (6.) Approx

*The weight and working data contained in the present leaflet are supplied for information only and are not binding. Specification and size can be altered as part of ongoing product modification/improvement.

Agra Engineering Co.

C-5 Laxmi Towers, Bandra Kurla Complex, Bandra (East), Mumbai 400 051, India.
Telephone: +91 22 675 44 555 (100 Lines) Fax: +91 22 675 44 544
URL: www.aeco.co.in email: enquiry@aeco.co.in