



FLUTED DISC

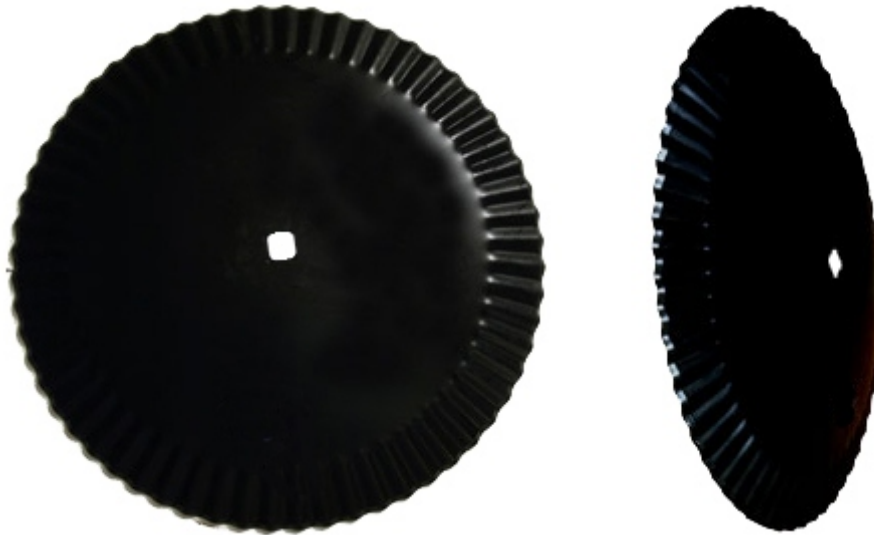

Dia-meter	Refer-ence	Thick-ness	Conca-vity	Concavity Inches	Hold Size	Hold Size Inches	Hole Shape	Axle	Axle inches	Edge	Bevel	Bolt Qty	Bolt size	Radius to fit bolt
22	LF2200	4.0	60	2-3/8	29,8	1-3/16	SQUARE	28,5	1-1/8	-	EXT	-	-	-
24	LF2400	4.5	74	2 7/8	29,8	1-3/16	SQUARE	28,5	1-1/8	-	EXT	-	-	-
24	LF2412	4.5	74	2 7/8	29.8 Ø 32.9	1-3/16 Ø 1-5/16	MIXTO	28.5 Ø 32.0	1-1/8 Ø 1-1/4	-	EXT	-	-	-
24	LF2424	4.5	74	2-7/8	31	1-7/32	SQUARE	30	1-3/16	EXT	EXT	-	-	-
24	LF2452	6.0	79	3-1/8	29,8	1-3/16	SQUARE	28,5	1-1/8	EXT	EXT	-	-	-
24	LF2462	6.0	79	3-1/8	31	1-1/4	SQUARE	30	1-3/16	EXT	EXT	-	-	-
26	LF2611	6.0	94	3-3/4	29,8	1-3/16	SQUARE	28,5	1-1/8	EXT	EXT	-	-	-
26	LF2650	6.0	94	3-3/4	39.7 Ø 42.9	1-9/16 Ø 1-11/16	MIXTO	38.1 Ø 41.27	1-1/2 Ø 1-5/8		EXT	-	-	-

FLUTED DISK (NOTCHED)

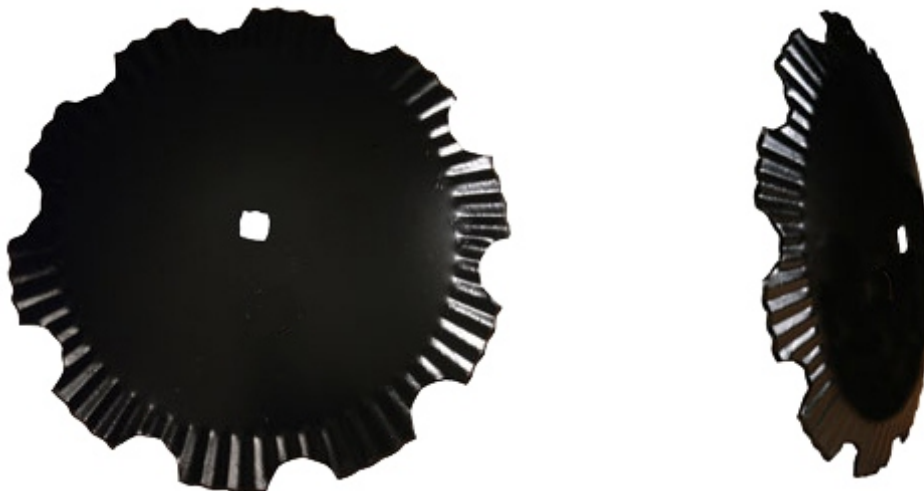

Dia-meter	Ref-erence	Thick-ness	Conca-vity	Concavity Inches	Hold Size	Hold Size Inches	Hole Shape	Axle	Axle inches	Edge	Bevel	Bolt Qty	Bolt size	Radius to fit bolt
24	DD2400	4,5	74	2 7/8	29,8	1-3/16	SQUARE	28,5	1-1/8	-	EXT	-	-	-
24	DD2460	6.0	79	3-1/8	Ø42.9	Ø1-11/16	ROUND	Ø41.5	Ø1-5/8	EXT	EXT	-	-	-
26	DD2621	6.0	94	3-3/4	Ø27.0	Ø1-1/16	ROUND			EXT	EXT	4	13,5	115
26	DD2650	6.0	94	3-3/4	39.7 Ø42.9	1-9/16 Ø1-11/16	DUAL ROUND SQUARE	38 Ø41.5	1-1/2 Ø1-5/8	EXT	EXT	-	-	-